

# VICRON®

## Fine Ground Calcium Carbonate - West Coast

### FEATURES

- ▶ Controlled Particle Size
- ▶ High Brightness
- ▶ High Chemical Purity

### BENEFITS

- ▶ Uniformity provides consistent processing
- ▶ Suitable for wide range of applications

### SHIPPING INFORMATION

Vicron® products ship from Lucerne Valley, CA

Product is available in 50 lb. bags, supersacks, and bulk.

For availability and minimum order quantity, contact customer service.

### SALES OFFICES

Lucerne Valley, CA  
800-255-5832

Bethlehem, PA  
800-801-1031

[www.mineralstech.com](http://www.mineralstech.com)

### Product Description

The VICRON® family of fine ground limestone products are high calcium limestone products for a wide range of applications. These products are characterized by controlled particle size, high brightness, and chemical purity, designed for use in multiple applications, including Paints & Coatings, Adhesives & Sealants, Thermoset Composites, PVC, Plastics, Cast Polymers, Rubber, and Elastomeric Roof Coatings.

Particle size uniformity is managed by the careful control of all processing conditions. These VICRON products are manufactured from a high quality deposit of limestone located in Lucerne Valley, CA, with consistent chemical and mineralogical composition.

### Vicron® Family of Products: Typical Properties \*\*

	10-20*	15-15*	25-11	31-6	41-8	45-3
Avg Particle Size (d50)	2.0	3.5	5.0	7.0	9.0	11.5
Top Size (d98) Microns by Sedigraph	10	15	20	30	40	45
Dry Brightness (Hunter Y, Rd Value)	96	96	96	96	95	95
Dry Color, (b value)	1.1	1.4	1.4	1.4	1.4	1.6
Bulk Density (lbs/ft <sup>3</sup> )	28	29	30	36	37	43
Tap Density (lbs/ft <sup>3</sup> )	68	71	77	90	92	102
Surface Area (m <sup>2</sup> /g)	4.3	3.0	2.7	1.6	1.4	1.1
Oil Absorption, (g/100g)	19	18	17	16	15	14


\* Vicron 10-20, and Vicron 15-15 are listed NSF/ANSI 14

\*\*Values listed are typical, not to be considered as specifications for products

### Chemical Properties

Calcium Carbonate (CaCO <sub>3</sub> )	98%
Magnesium Oxide (MgO)	0.5%
Iron (Fe <sub>2</sub> O <sub>3</sub> )	<0.1%
Moisture (% weight loss @110°C) Computrac Max 5000	0.3%

### Sedigraph Particle Size Distribution

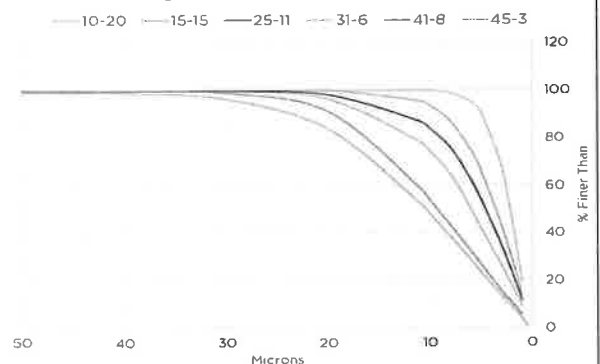

All products are sold or otherwise provided on the understanding that the Buyer or other user is solely responsible for determining their suitability for the intended use. All information provided is based upon our research, is typical of the products, and is believed to be accurate, but no guarantee, either expressed or implied, is made with respect thereto or with respect to the infringement of any patent. SMI MAKES NO WARRANTY OF MERCHANTABILITY OR SUITABILITY FOR ANY PARTICULAR PURPOSE IN CONNECTION WITH ANY SALE OR USE OF THE PRODUCTS DESCRIBED HEREIN. Inconsistent terms and conditions contained in Buyer's purchase order shall not be binding on SMI/BMI unless reflected in writing signed by SMI/BMI's representative. This information is not to be copied, used in evidence, released for publication or public distribution without written permission from Specialty Minerals Inc./Barretts Minerals Inc.

The Minerals Technologies Logo, Specialty Minerals Logo, and VICRON are registered trademarks of Minerals Technologies Inc. or its subsidiaries.



**Specialty**  
MINERALS

- ▶ GCC
- ▶ Talc
- ▶ Specialty PCC