



Better Air is Our Business®

AmericanAirFilter® **AmerSeal®**

Self Sealing, Internal Wire Frame Ring and Link Panel Filters

- **Three models: Gold (4-ply); Blue (3-ply), Green (2-ply)**
- **All models available with antimicrobial**
- **Self-sealing design provides fast and easy installation requiring no clips or latches**
- **Leak free, no dirty air bypass**
- **Moisture resistant, polyester media**
- **MERV 8**

AmerSeal self-sealing, ring and link panel filters are available in Gold (4-ply), Blue (3-ply), and Green (2-ply) designs.

AmerSeal filters offer unitized construction. Layers of AmerSeal filter media are sealed around the entire perimeter of the filter, and at various points on the face, to bond the wire frame inside the layers of media. The entire assembly is designed for dependable, trouble-free operation.

IAQ Enhanced Performance

All AmerSeal filters are available with antimicrobial. The antimicrobial is effective in restricting the spread of microbes known to affect Indoor Air Quality (IAQ). Used on AmerSeal filter media, the antimicrobial helps preserve the integrity of the filter throughout its useful life by limiting the proliferation of microbes it contacts.

Link Panels

Link panels are used primarily in side access systems where the entire link can be easily inserted into, and removed from, the channel as a single unit. No extended reaching or struggling with special removal devices. Fast and simple filter changing saves maintenance cost and time. Also, the continuous link design eliminates bypass between filters which can allow unfiltered air to enter the system.



Saves on Shipping and Storage

The AmerSeal filter design reduces the cost of shipping and storage, when compared to conventional filters with cardboard frames. As a result, using AmerSeal filters can mean fewer trips to air handlers for maintenance personnel and smaller boxes to handle.


Consistency of Performance

AAF's refined manufacturing processes ensure consistency of performance for every AmerSeal filter. This consistency means that you will have filtration you can count on each time you insert an AmerSeal filter into your HVAC system.


AAF is dedicated to continually improving IAQ. For more than 90 years, our slogan has been "Better Air is Our Business." That experience and knowledge are incorporated into every AmerSeal filter you purchase.

Efficiency Versus Particle Size

2-Ply Ring Panel Filter
Composite Minimum Efficiency Curve
Per ASHRAE 52.2

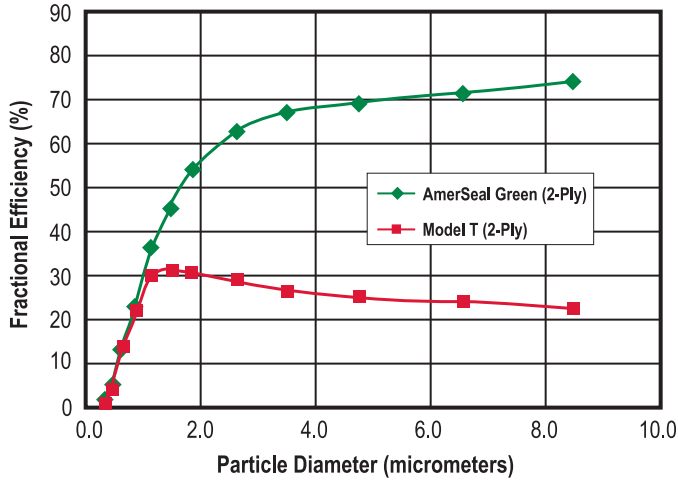


3-Ply Ring Panel Filter
Composite Minimum Efficiency Curve
Per ASHRAE 52.2

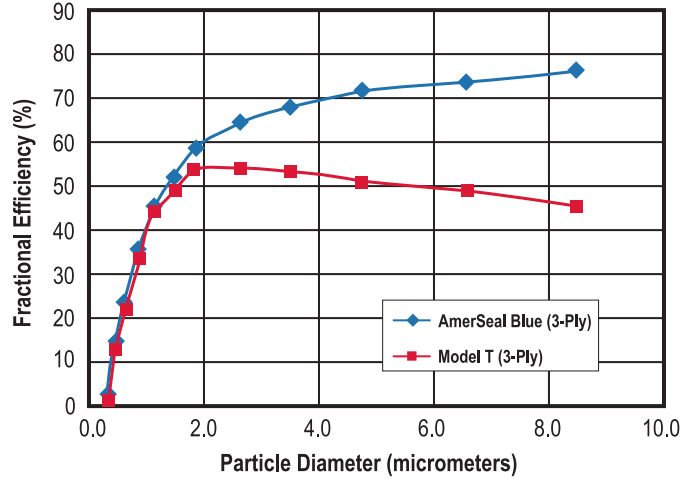


Airflow Versus Resistance

4-Ply Ring Panel Filter
Composite Minimum Efficiency Curve
Per ASHRAE 52.2

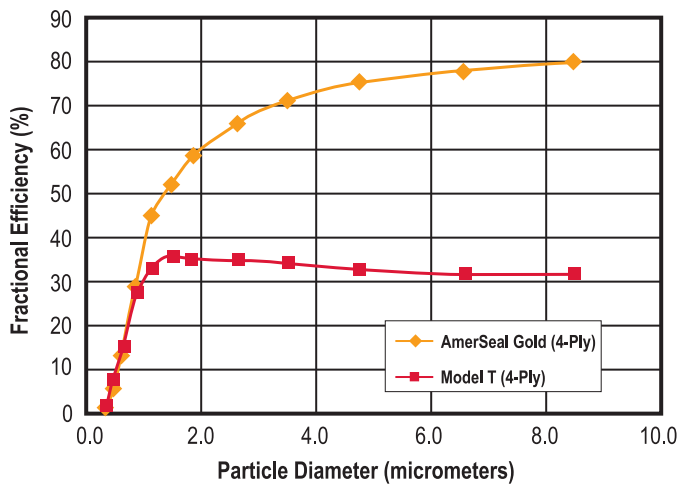

Filter Initial Resistance vs. Airflow

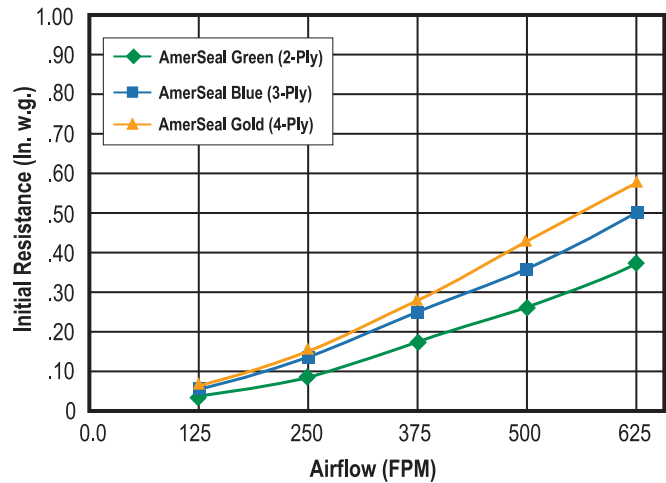

Maximum Continuous Operating Temperature
175°F (79°C)

Rated Airflow
500 FPM

Underwriters Laboratories Classification

AmerSeal filters are UL and CUL Classified.

Testing was performed according to UL Standard 900 and ULC-S111.

AmerSeal® is a registered trademark of AAF International in the U.S.



AAF International Building
9920 Corporate Campus Dr., Suite 2200
Louisville, Kentucky 40223-5000

Customer Service 888.223.2003
Fax 888.223.6500



AAF has a policy of continuous product research and improvement and reserves the right to change design and specifications without notice.

ISO Certified Firm